


Product data sheet

SAT-TV-FM socket outlet insert

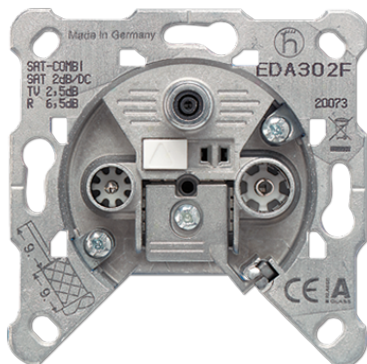

Reference number

EDA 302 F

SAT-TV-FM socket outlet insert

screwless terminals

3-gang all-round antenna socket with interconnected frequency bands, thus flexible and future proof.

Suitable for SAT IF and CATV domestic distribution installations.

Seamless CATV and SAT ranges and low distribution attenuation thanks to combined filter-tap structure.

Housing: torsion-resistant, passivated diecast zinc

Terminated outlets are used for individual and community installation (BK, CATV, MATV) connected to decoupling stub lines.

Covers:

AS / A ranges: ref.-no.: A 561 PLSAT ..

CD range: ref.-no.: CD 561 SAT ..

SL range: ref.-no.: SL 561 SAT ..

LS range: ref.-no.: ..990 SAT ..

Technical data

IN – TV (IEC male)

Frequency range: 5 ... 862 MHz

Attenuation: 2.5 dB

IN – RF (IEC female)

Frequency range: 5 ... 118 MHz

Attenuation: 6.5 dB

IN – SAT (F female)

Frequency range: 950 ... 2150 (2400) MHz

Attenuation: 2.2 dB

Isolation

TV – SAT: VHF, UHF / SAT: 20/20 dB

RF – SAT: VHF / SAT: 35/30 dB

TV – RF: VHF, UHF: 20 dB

DC through

SAT-IN (F female): 13/18 V, 22 kHz
max. +24 V/0.5 A

Version:

Terminated outlet