


# Product data sheet

## SCHUKO® socket with USB charger

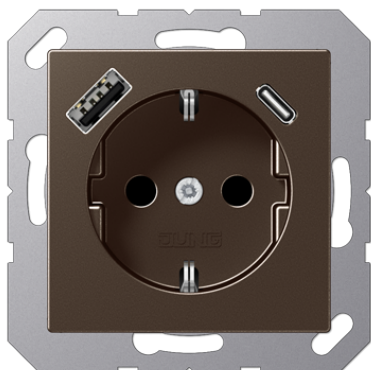

### Reference number

A 1520-15 CA MO

### SCHUKO® socket with USB charger

with enhanced contact protection / shutter (Safety Plus)  
with 1 USB port type A and 1 USB port type C  
with screwless terminals for rigid and untreated flexible wires up to 2.5 mm<sup>2</sup>

Installation in flush box with dimensions according to DIN 49073  
depth of flush box (inner dimension): min. 57 mm

### Technical data

|                              |                             |
|------------------------------|-----------------------------|
| Rated voltage:               | AC 220 ... 250 V ~          |
| Mains frequency:             | 50/60 Hz                    |
| Rated current, socket:       | 16 A                        |
| Output voltage USB:          | DC 5 V                      |
| Output current USB (total):  | 3 A                         |
| Stand-by power:              | ≤ 25 mW                     |
| Ambient temperature:         | +5 ... +35 °C               |
| Stora/transport temperature: | -20 ... +70 °C              |
| Protection level:            | IP 20                       |
| Connection mode:             | screwless terminals         |
| single wire:                 | 1.5 ... 2.5 mm <sup>2</sup> |
| stranded without ferrule:    | 1.5 ... 2.5 mm <sup>2</sup> |

### Thermoplastic (breakproof) lacquered

**Colour:**  
mocha

**Material:**  
thermoplastic lacquered